



Professional Lighting

Exterior **LED**
Lighting







NW5060



NW5085



MR 5060



MR 5085

Specification

- Die-cast aluminum housing and front cover
- PVC mounting enclosure
- COB LEDs
- 110-240V versions driver included
- IP65

Applications

- Outdoor stairs
- Corridors
- Wall decoration

Model	Input	LED QTY	Watts	Lumens	Color temp.	CRI
MR 5060	110V-240V	1PC	2W	65LM	3000K/6000K	>90
MR 5085	110V-240V	1PC	3W	75LM	3000K/6000K	>90







MWL31A 2*3W



MWL31B 2*6W



WL31A 2*3W



WL31B 2*6W


Specification

- Die-cast aluminum housing
- Tempered glass cover
- COB LEDs
- LED driver included
- IP65

Applications

- Wall decoration
- Corridors
- Balconies

Model	Input	LED QTY	Watts	Lumens	Color temp.	CRI
MWL31A 2*3W	110V-240V	1PC	2*3W	130LM	3000K/6000K	>90
MWL31B 2*6W	110V-240V	1PC	2*6W	260LM	3000K/6000K	>90




Black

MWL35 2*3W



White

MWL35 2*3W



WL35 2*3W

Specification

- Die-cast aluminum housing
- Tempered glass cover
- COB LEDs
- LED driver included
- IP65

Applications

- Wall decoration
- Corridors
- Balconies

Model	Input	LED QTY	Watts	Lumens	Color temp.	CRI
MWL35 2*3W	110V-240V	1PC	2*3W	130LM	3000K/6000K	>90






NE401 3W




NE402 3W




NE403 3W



NE401 3W



NE402 3W



NE403 3W

Specification

- Die-cast aluminum housing
- Tempered glass cover
- CREE LEDs
- PVC mounting sleeve
- LED driver included with 110-240V versions only
- IP67

Applications

- Outdoor decorative lighting
- Paths
- Squares and parks


Model	Input	LED QTY	Watts	Lumens	Color temp.	CRI
NE401 3W	110V-240V	1PC	3W	65LM	3000K/6000K	>90
NE402 3W	110V-240V	1PC	3W	65LM	3000K/6000K	>90
NE403 3W	110V-240V	1PC	3W	65LM	3000K/6000K	>90




NE301 6W



NE302 10W

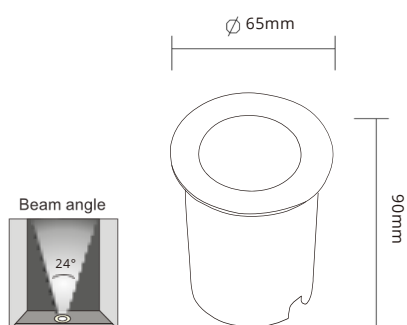

NE301 6W

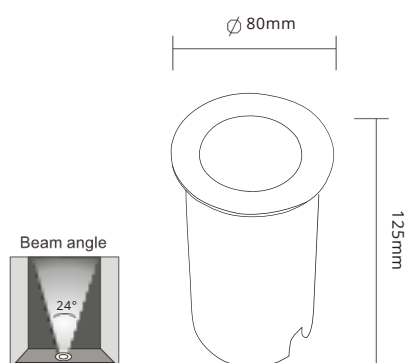

NE302 10W

Specification

- Die-cast aluminum housing
- Tempered glass cover
- COB LEDs
- PVC mounting sleeve
- LED driver included with 110-240V versions only
- IP67

Applications

- Outdoor decorative lighting
- Paths
- Squares and parks

Model	Input	LED QTY	Watts	Lumens	Color temp.	CRI
NE301 6W	110V-240V	1PC	6W	130LM	3000K/6000K	>90
NE302 10W	110V-240V	1PC	10W	195LM	3000K/6000K	>90






FL4011 5W




FL4011 10W




FL4011 15W



FL4011 5W

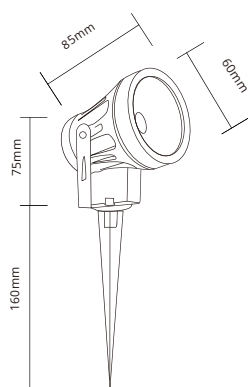

FL4011 10W

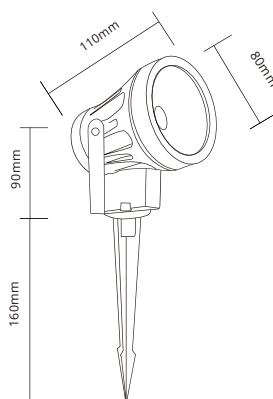

FL4011 15W

Specification

- Die-cast aluminum housing
- Tempered glass
- COB LEDs
- LED driver included
- IP65

Applications

- Lawns and gardens
- Paths

Model	Input	LED QTY	Watts	Lumens	Color temp.	CRI
FL4011 5W	110V-240V	1PC	5W	130LM	3000K/6000K	>90
FL4011 10W	110V-240V	1PC	10W	195LM	3000K/6000K	>90
FL4011 15W	110V-240V	1PC	15W	325LM	3000K/6000K	>90







NG5623-2 10W



NG5623-1 7W

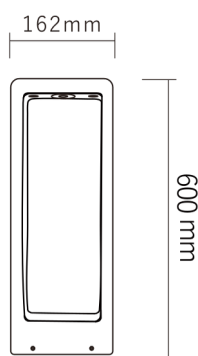

NG5623-2 10W



NG5623-1 7W

Specification

- Extruded aluminum housing
- Tempered glass
- COB LEDs
- LED driver included
- IP65
- Supplied complete with mounting bolts

Applications


- Lawns and gardens
- Paths
- Parking areas

Model	Input	LED QTY	Watts	Lumens	Color temp.	CRI
NG5623-1 7W	110V-240V	1PC	7W	150LM	3000K/6000K	>90
NG5623-2 10W	110V-240V	1PC	10W	195LM	3000K/6000K	>90





HWS24 24W

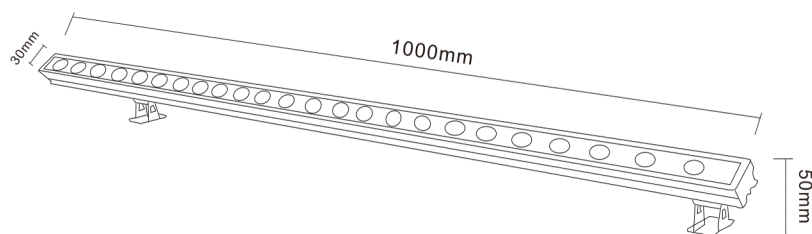

HWS24 24W

Specification

- Extruded aluminum housing
- Tempered glass
- SMD LEDs
- LED driver included
- IP65

Applications

- Lawns and gardens
- Paths

Model	Input	LED QTY	Watts	Lumens	Color temp.	CRI
HWS24 24W	110V-240V	1PC	24W	520LM	3000K/6000K	>90





NE401 3W



NE501 12W

Specification

- Stainless steel housing and bezel
- Tempered glass
- PVC mounting sleeve
- CREE LEDs
- LED driver not included
- IP68

Applications

- Swimming pools
- Fountains
- Underwater decorations

Options

- DC 24V IP65 drivers



NLED-DV110*

Model	Input	LED QTY	Watts	Lumens	Color temp.	CRI
NE401 3W 24V	DC24V	1PC	3W	65LM	3000K/6000K	>90
NE501 12W 24V	DC24V	1PC	12W	65LM	3000K/6000K	>90